



Versapoint® is a whole new self-service kiosk for retail stores and quick-service restaurants. It delivers an elegant look, easy installation, and quick maintenance. Beyond comparison, designed with diverse business needs in mind, versapoint® is engineered to offer rich functionalities with peripheral and customized options. versapoint®, surprisingly easy, takes self-service technology to the next generation.

## APPLICATIONS



**Counter Top**



**Wall Mount**

### SYSTEM

2700 KIOSK	
Processors	Intel® Core™ i3-1115G4 Processor 6M Cache, up to 4.10 GHz
Chipset	Intel® Tiger Lake
Memory	8GB Standard, DDR4 3200 MT/s, 1x Socket x SODIMM (Max. 32 GB)
Storage	SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI
Operating Systems	Windows 10 IoT Enterprise LTSC
Audio	HD Audio Codec

### 2700 KIOSK

**SUPERIOR PERFORMANCE**

INTEL® CORE™ OFFERS THE LATEST INTEL® CPU, 11TH GEN. TIGER LAKE THAT PROVIDES ENHANCED SPEED AND SUPERIOR PERFORMANCE. IT FULFILLS CUSTOMERS' DIVERSE BUSINESS ENVIRONMENTS AND NEEDS.

### DISPLAY



2700 KIOSK	
TYPE	27" TFT LCD, LED Backlight
RESOLUTION	1080 x 1920
BRIGHTNESS	300 cd/m² (typ.)
TOUCHSCREEN	Projected Capacitive Touch
RESPONSE	12 ms
CONTRAST RATIO	3000 (typ.)

### I/O PORTS




### INTERFACE

2700 KIOSK	
USB	6 (Rear 2 (2 x USB 3.0), Back 4 (4 x USB 2.0)) 3 (3 x USB 2.0 (Reserved for MSR, SCR, i-button / Touch Controller / Camera), RJ-45)
SERIAL	6 (COM1 with 5V / 12V Power Output on 9 Pins, BIOS, Reserved for NFC) (COM2~3 RJ-45, Full Signal, Reserved for Cash Module) (COM4 RJ-11, Only TX / RX, 12V Power Output, Reserved) (COM5 Reserved for Printer) (COM6 RJ-45, Only TX / RX, 5V Power Output, Reserved for MSR, IC Card)
LAN	1 x Gigabit Ethernet, RJ-45
POWER DC-IN	3 Pin DIN Jack
POWER	
POWER SUPPLY	Adapter 24V, 6.35A
PEDESTAL	
MATERIAL	Galvanized Steel Plate
MATERIAL THICKNESS	1.2T
COMPONENT ACCESS	Security Locks with 7-Pin Tumbler / Rear Security Door

### OPTIONS

2700 KIOSK	
STORAGE	2.5 inch SSD 128GB, HDD 500GB, 1TB
BUILT-IN PRINTER	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)
BARCODE SCANNER	1D, 2D Barcode
CAMERA	2M USB Interface (Internal) (Factory Option)
MAGNETIC STRIPE READER	Comply with ISO 7811, Support 1 & 2 & 3 Track
SMART CARD READER	EMV Level 1
NFC READER	MIFARE, FeliCa, ISO / IEC 14443A, ISO / IEC 14443B, ISO / IEC 15693
WALL MOUNT KIT	VESA-Compatible, 100 x 100 mm, 200 x 200 mm
SPEAKER	1 x 5W (Mono) / 2 x 5W (Stereo) (Factory Option)
WIFI	M.2 for WiFi / BT
BRACKET PAYMENT	EFT Terminal Bracket option
CUSTOM OPTIONS	Customer-Assigned EMV Terminal Bracket, Bill / Coin Acceptor, Document Reader (Passports/IDs), Ticket / Document Printer, UPS (Uninterruptible Power Supply)

\*Specifications may change without prior notice.

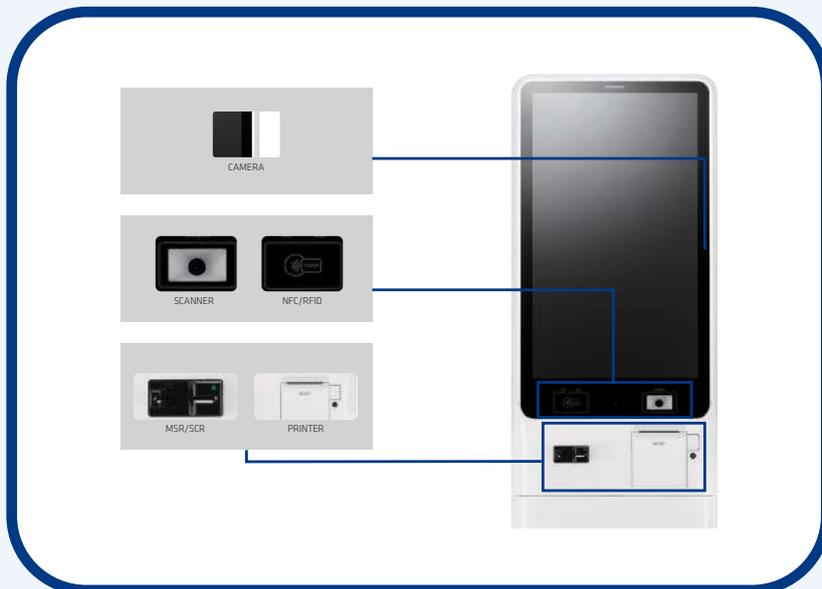

### PHYSICAL & ENVIRONMENTAL

2700 KIOSK	
OPERATING TEMPERATURE	0 °C ~ 60 °C at 10% to 90% Humidity
STORAGE TEMPERATURE	-20 °C ~ 80 °C at 10% to 90% Humidity
2700 KIOSK	
DIMENSIONS (W X H X D)	System : 430 x 880 x 140 (mm), 16.9 x 34.6 x 5.5 (in) Pedestal : 430 x 870 x 140 (mm), 16.9 x 34.2 x 5.5 (in) Baseplate : 600 x 10 x 450 (mm), 23.6 x 0.39 x 17.7 (in) Baseplate (Counter Top) : 600 x 10 x 410 (mm), 23.6 x 0.39 x 16.1 (in)
PACKING DIMENSIONS (W X H X D)	System : 570 x 1,000 x 260 (mm), 22.4 x 39.3 x 10.2 (in) Pedestal : 570 x 1,000 x 260 (mm), 22.4 x 39.3 x 10.2 (in) Baseplate : 630 x 60 x 480 (mm), 24.8 x 2.4 x 18.9 (in)
NET WEIGHT	System : 15,000g, 33.06 lbs Pedestal : 13,000g, 28.66 lbs Baseplate : 20,000g, 44.09 lbs
PACKING WEIGHT	System : 21,000g, 46.29 lbs Pedestal : 17,000g, 37.47 lbs Baseplate : 21,000g, 46.29 lbs
COLOR	High Gloss White

